

HDTV Over-the-Air Antenna

Connect Through TV

View instructions for your Winegard antenna here (<https://www.youtube.com/watch?v=hJxPaA0NC7A>)



(<https://www.youtube.com/watch?v=hJxPaA0NC7A>)

View instructions for your RCA antenna here (<http://www.rcaantennas.net/setup/>)



(<http://www.rcaantennas.net/setup/>)

Scan Over-the-Air Channels

These steps are generalized for use with multiple television brands. Button and menu names may vary from steps listed below.

- 1** Power the TV OFF/ON and take note of what channel or input the TV is on

2

Connect the digital Winegard or RCA Antenna to the TV's Antenna In/Air/Cable port

If applicable, plug antenna in to power source





- 3** If TV requires a conversion box, connect the digital OTA antenna to the conversion box. If TV does not require a conversion box, skip to step 5.



4 Connect the conversion box to the TV



5 Using the TV, or the TV remote, Press the Menu/Settings/Home button



6 Select Channel/Setup/Auto Tuning/Installation/System (If the option Air/Cable, select Air)

7 Select Scan Channels/Program Channels/Autoscan/Autoprogram

8 Select Start/Enter/OK to begin scan

9 Select OK/Done to complete scan


Scan Over-the-Air Samsung Example

This is an example showing a Samsung brand television and remote. These steps will not be the same for other television brands.


1 Press Menu on the TV remote




2 Select Channel
(Set Antenna to Air)

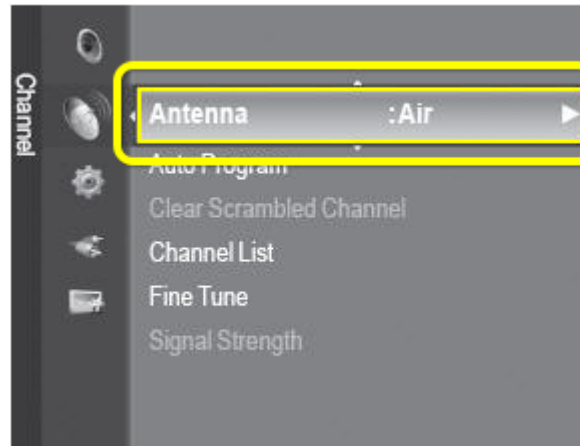


3 Select AutoProgram

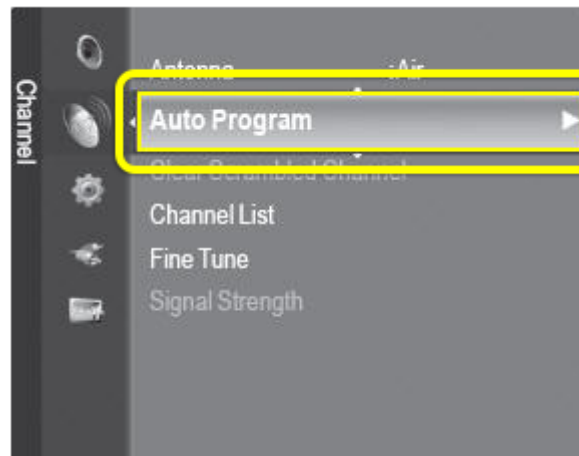


4 Select Start

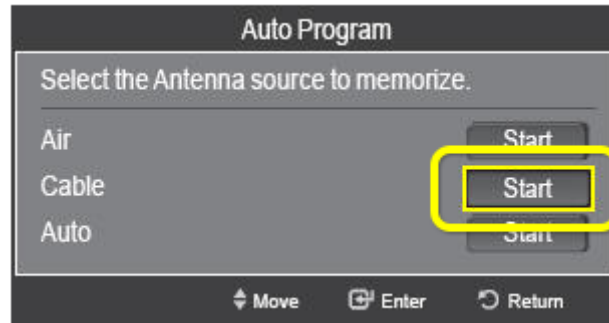

5 Select Start

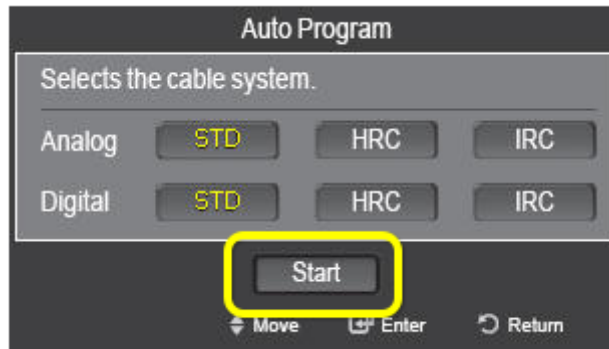

6 Allow channels to be scanned

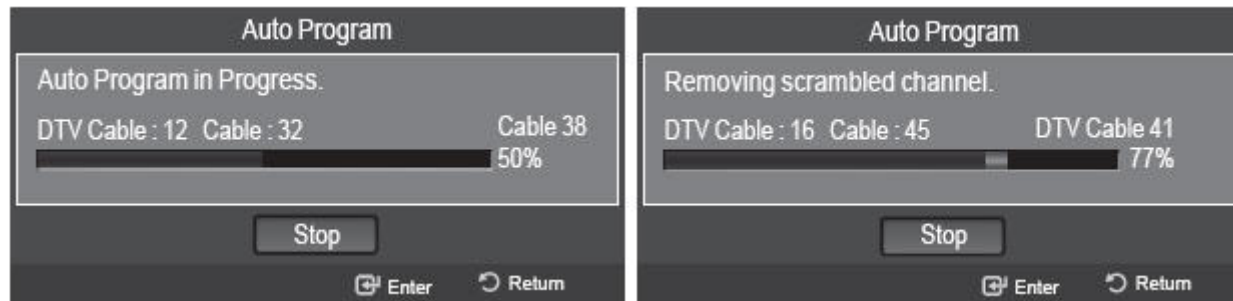

7 Select OK